


## DHD140H05B/ESD

printed on: 29-04-2025



### TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	5 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	7 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse $\Delta p$	210 bar
Seals	NBR
Temperature range	-30°C +100°C
Note	ANTI-ESD FILTER ELEMENT

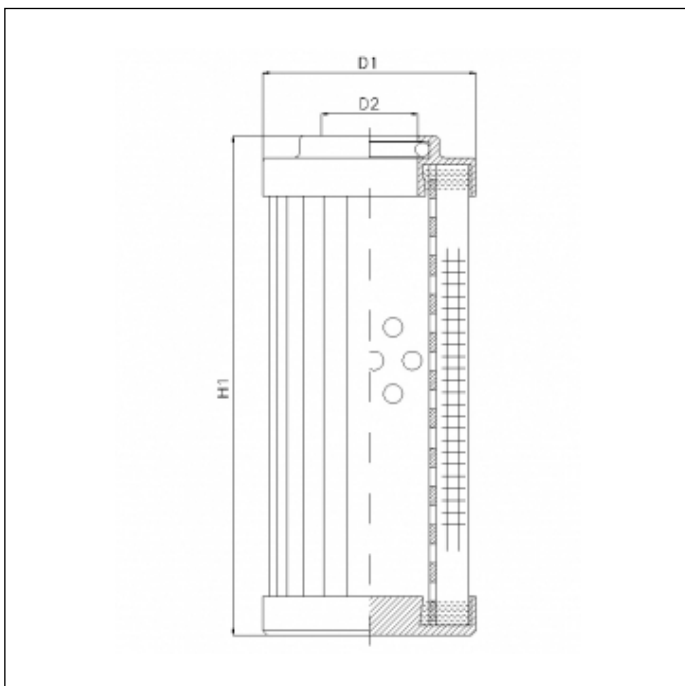

### OVERALL DIMENSIONS

D1	47,0 mm
D2	22,1 mm
H1	193,0 mm

Technical information may change without notice. Image and drawing are representative only