


DHD35G01B/ESD

printed on: 29-04-2025



TECHNICAL INFO

| | |
|---------------------|---|
| Media type | INORGANIC FIBERGLASS |
| Efficiency | <math> < 4 \mu\text{m}_{(c)} \beta_x \geq 200 </math> |
| Efficiency 1 | $4 \mu\text{m}_{(c)} \beta_x \geq 1000$ |
| Flow direction | OUT-IN |
| Collapse Δp | 20 bar |
| Seals | NBR |
| Temperature range | -30°C +100°C |
| Note | ANTI-ESD FILTER ELEMENT |

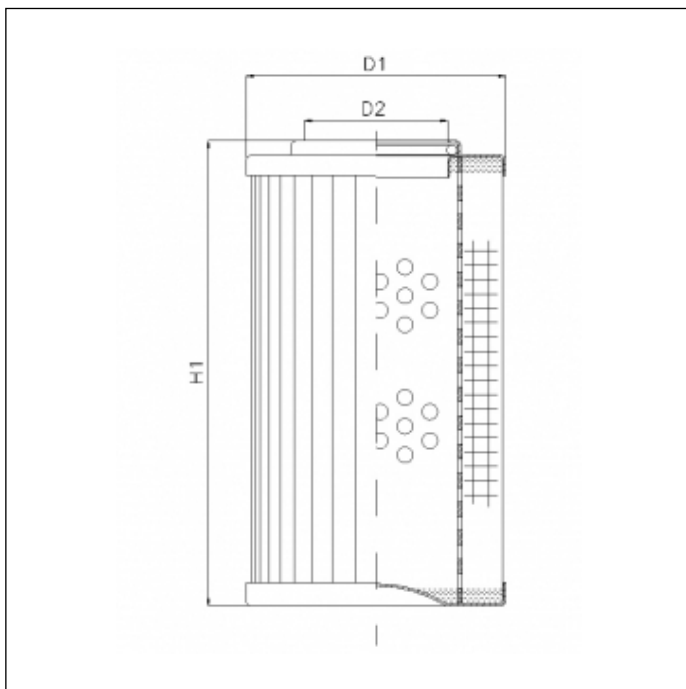

OVERALL DIMENSIONS

| | |
|----|---------|
| D1 | 56,3 mm |
| D2 | 25,5 mm |
| H1 | 72,0 mm |