


DHD450H03B/ESD

printed on: 23-04-2025

TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	$<4 \mu\text{m}_{(c)} \beta_x \geq 200$
Efficiency 1	$5 \mu\text{m}_{(c)} \beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	210 bar
Seals	NBR
Temperature range	-30°C +100°C
Note	ANTI-ESD FILTER ELEMENT

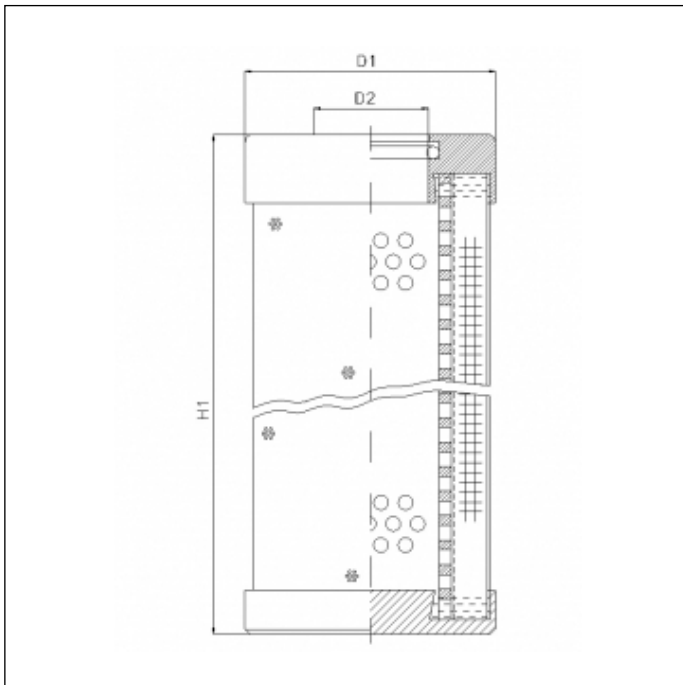

OVERALL DIMENSIONS

D1	78,0 mm
D2	43,0 mm
H1	210,0 mm