


DHD60G20V/ESD

printed on: 29-04-2025



TECHNICAL INFO

| | |
|---------------------|--|
| Media type | INORGANIC FIBERGLASS |
| Efficiency | 20 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$ |
| Efficiency 1 | 22 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$ |
| Flow direction | OUT-IN |
| Collapse Δp | 20 bar |
| Seals | FKM |
| Temperature range | -25°C +120°C |
| Note | ANTI-ESD FILTER ELEMENT |

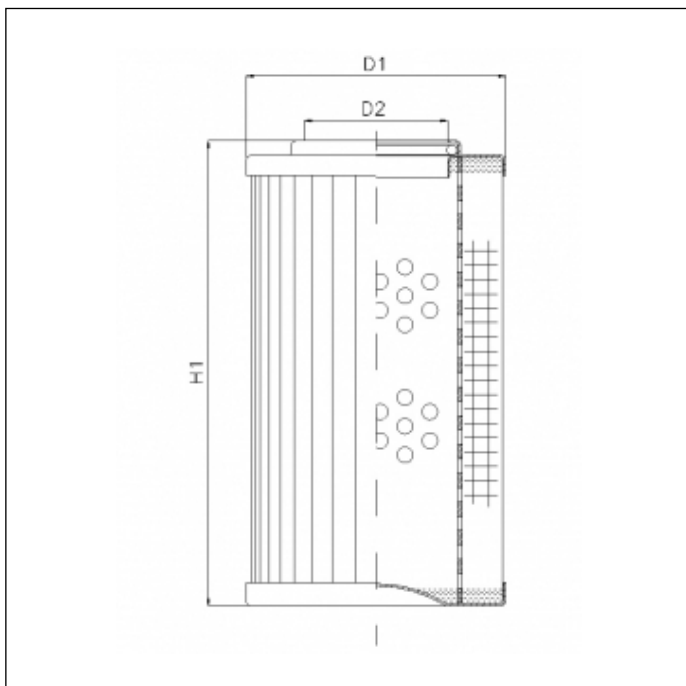

OVERALL DIMENSIONS

| | |
|----|---------|
| D1 | 47,0 mm |
| D2 | 22,4 mm |
| H1 | 84,0 mm |