


DHD75G01B/ESD

printed on: 29-04-2025



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	<math> < 4 \mu\text{m}_{(c)} \beta_x \geq 200 </math>
Efficiency 1	$4 \mu\text{m}_{(c)} \beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	20 bar
Seals	NBR
Temperature range	-30°C +100°C
Note	ANTI-ESD FILTER ELEMENT

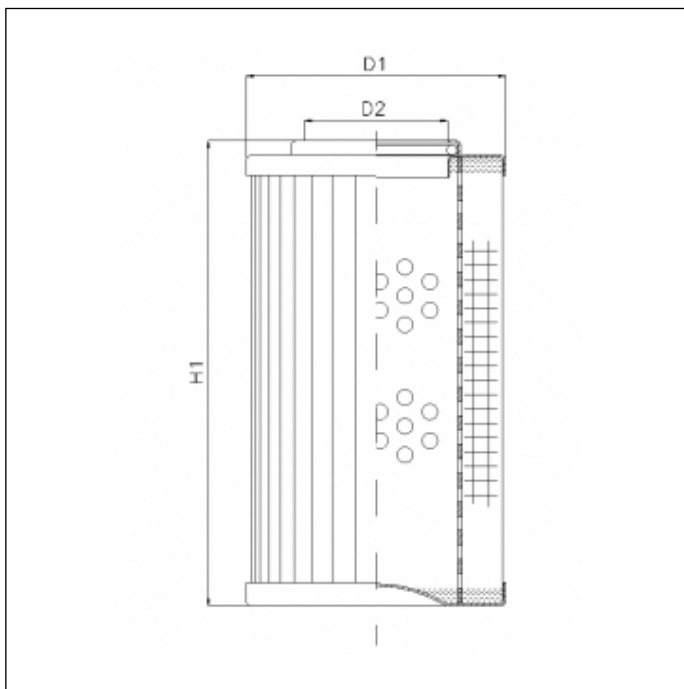

OVERALL DIMENSIONS

D1	56,3 mm
D2	25,5 mm
H1	170,0 mm