


R740G25

printed on: 23-04-2025



TECHNICAL INFO

| | |
|-------------------|--|
| Media type | INORGANIC FIBERGLASS |
| Efficiency | 20 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$ |
| Efficiency 1 | 22 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$ |
| Flow direction | IN-OUT |
| Burst Δp | 10 bar |
| Seals | NBR |
| Temperature range | -30°C +100°C |

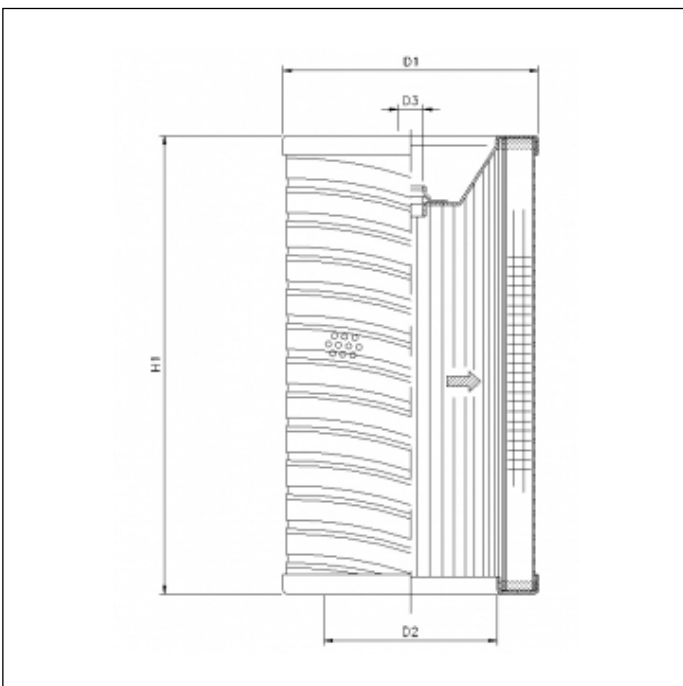

OVERALL DIMENSIONS

| | |
|----|----------|
| D1 | 202,0 mm |
| D2 | 157,0 mm |
| D3 | 14,2 mm |
| H1 | 330,0 mm |

Technical information may change without notice. Image and drawing are representative only