


RHR1300G03V6/AB1

printed on: 13-04-2026



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	<math> <4 \mu\text{m}_{(c)} \beta_x \geq 200 </math>
Efficiency 1	$5 \mu\text{m}_{(c)} \beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	20 bar
Bypass setting	6.0 bar
Seals	FKM
Temperature range	-25°C +120°C

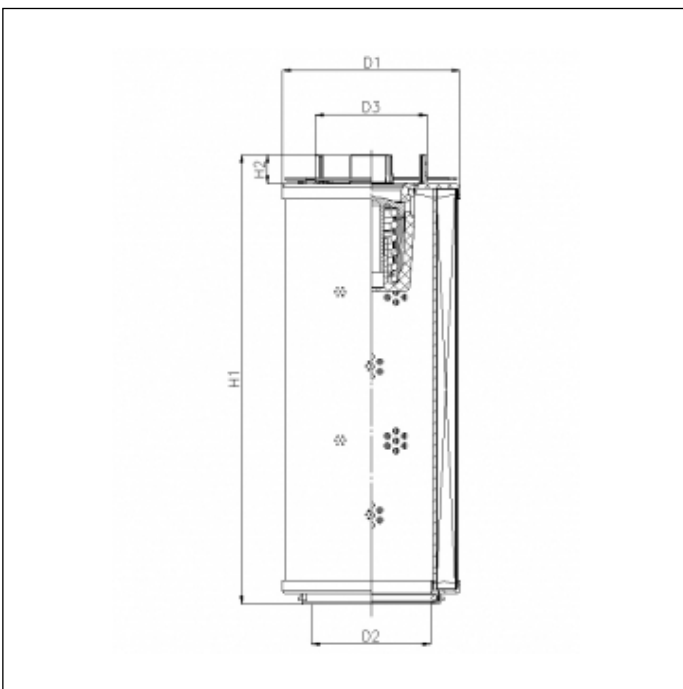

OVERALL DIMENSIONS

D1	143,5 mm
D2	96,5 mm
D3	90,5 mm
H1	483,0 mm
H2	23,5 mm

Technical information may change without notice. Image and drawing are representative only