


RHR150G20V0/AB1

printed on: 29-04-2025



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	20 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	22 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	20 bar
Seals	FKM
Temperature range	-25°C +120°C

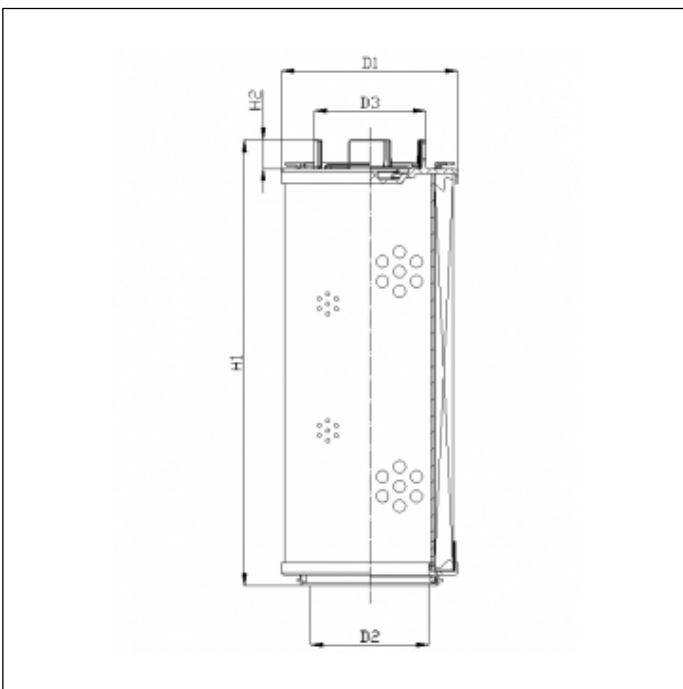

OVERALL DIMENSIONS

D1	52,0 mm
D2	22,2 mm
D3	24,0 mm
H1	257,0 mm
H2	10,3 mm

Technical information may change without notice. Image and drawing are representative only