


RHR160A10B3/AB1

printed on: 23-04-2025



TECHNICAL INFO

Media type	STAINLESS STEEL FIBER
Efficiency	10 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Flow direction	OUT-IN
Collapse Δp	20 bar
Bypass setting	3.0 bar
Seals	NBR
Temperature range	-30°C +100°C

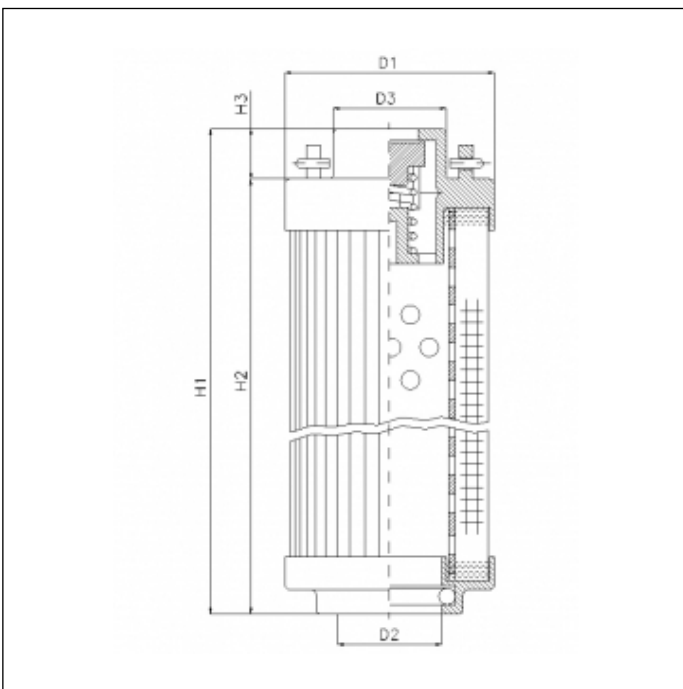

OVERALL DIMENSIONS

D1	60,0 mm
D2	34,5 mm
D3	36,0 mm
H1	144,5 mm
H2	130,5 mm
H3	14,0 mm

Technical information may change without notice. Image and drawing are representative only