


RHR160N10B3/AB1

printed on: 18-07-2025



TECHNICAL INFO

Media type	IMPREGNATED PAPER
Efficiency	10 $\mu\text{m}_{(c)}$ $\beta_x \geq 2$
Flow direction	OUT-IN
Collapse Δp	20 bar
Bypass setting	3.0 bar
Seals	NBR
Temperature range	-30°C +100°C

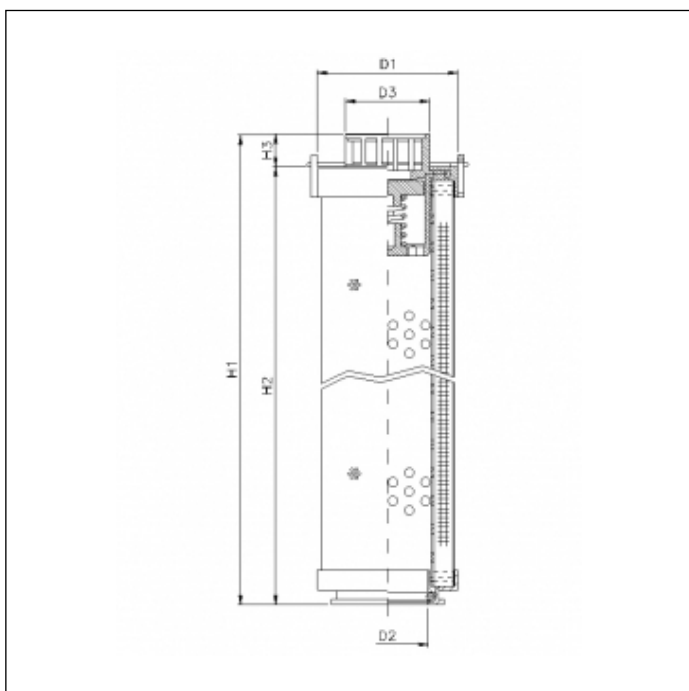

OVERALL DIMENSIONS

D1	73,5 mm
D2	34,2 mm
D3	36,0 mm
H1	144,0 mm
H2	130,0 mm
H3	14,0 mm