


## RHR165G05B

printed on: 24-04-2025



### TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	5 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	7 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse $\Delta p$	20 bar
Bypass setting	3.0 bar
Seals	NBR
Temperature range	-30°C +100°C

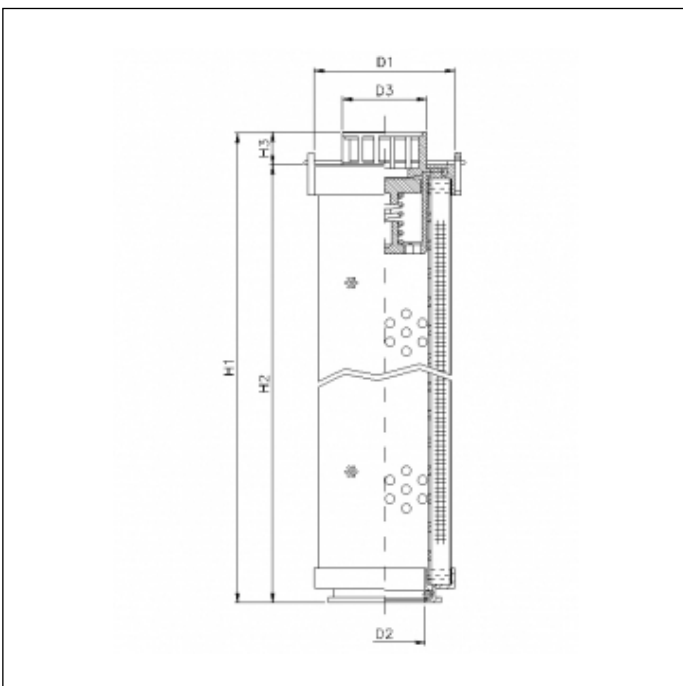

### OVERALL DIMENSIONS

D1	60,0 mm
D2	34,2 mm
D3	36,0 mm
H1	228,5 mm
H2	215,0 mm
H3	13,5 mm