


RHR165M10V

printed on: 29-04-2025



TECHNICAL INFO

Media type	SYNTHETIC MEDIA
Efficiency	12 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	15 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	20 bar
Bypass setting	3.0 bar
Seals	FKM
Temperature range	-25°C +100°C

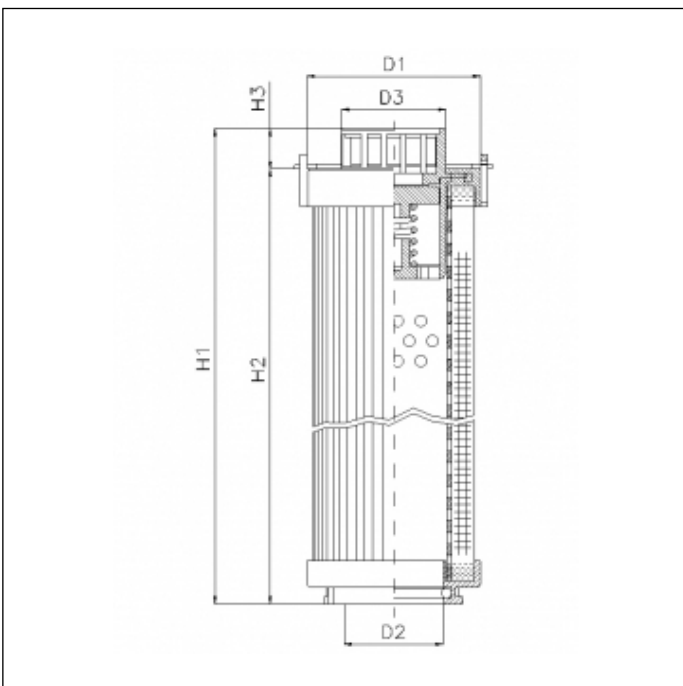

OVERALL DIMENSIONS

D1	60,0 mm
D2	34,2 mm
D3	36,0 mm
H1	228,5 mm
H2	215,0 mm
H3	13,5 mm

Technical information may change without notice. Image and drawing are representative only