


## RHR165N20V

printed on: 29-04-2025



### TECHNICAL INFO

Media type	IMPREGNATED PAPER
Efficiency	25 $\mu\text{m}_{(c)}$ $\beta_x \geq 2$
Flow direction	OUT-IN
Collapse $\Delta p$	20 bar
Bypass setting	3.0 bar
Seals	FKM
Temperature range	-25°C +100°C

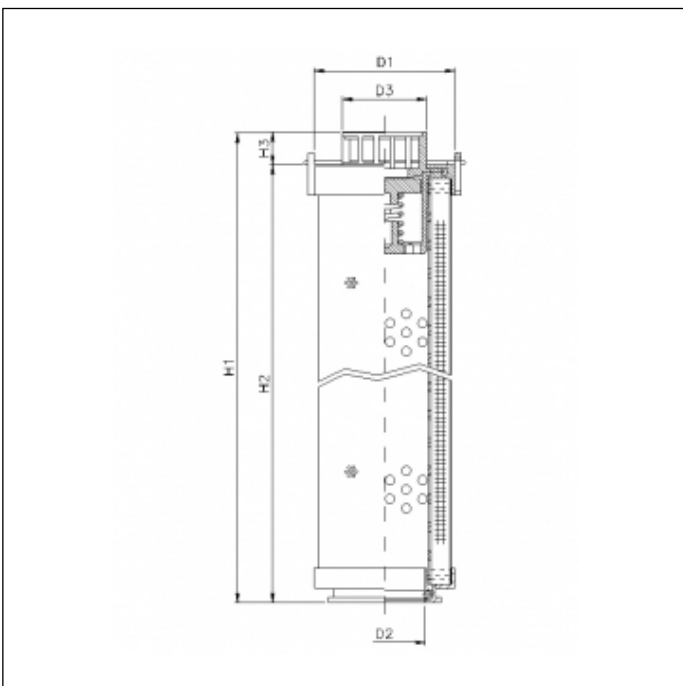

### OVERALL DIMENSIONS

D1	60,0 mm
D2	34,2 mm
D3	36,0 mm
H1	228,5 mm
H2	215,0 mm
H3	13,5 mm

Technical information may change without notice. Image and drawing are representative only