


## RHR165S100V

printed on: 29-04-2025



### TECHNICAL INFO

Media type	WIRE MESH
Efficiency	100 µm
Flow direction	OUT-IN
Collapse $\Delta p$	20 bar
Bypass setting	3.0 bar
Seals	FKM
Temperature range	-25°C +100°C

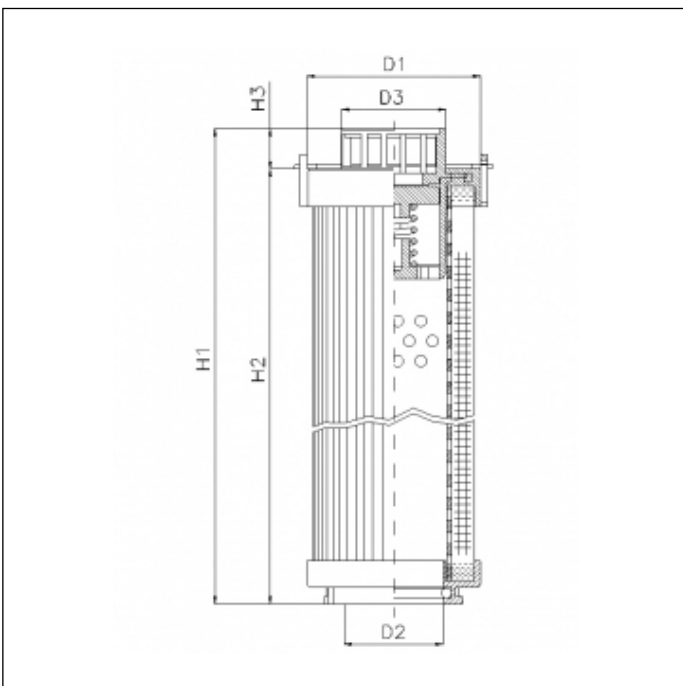

### OVERALL DIMENSIONS

D1	60,0 mm
D2	34,2 mm
D3	36,0 mm
H1	228,5 mm
H2	215,0 mm
H3	13,5 mm

Technical information may change without notice. Image and drawing are representative only