


# **RHR185G01V/3/ESD**

printed on: 05-08-2025

## **TECHNICAL INFO**

Media type	INORGANIC FIBERGLASS
Efficiency	$<4 \mu\text{m}_{(c)} \beta_x \geq 200$
Efficiency 1	$4 \mu\text{m}_{(c)} \beta_x \geq 1000$
Flow direction	OUT-IN
Collapse $\Delta p$	20 bar
Bypass setting	1.0 bar
Seals	FKM
Temperature range	-25°C +100°C
Note	ANTI-ESD FILTER ELEMENT

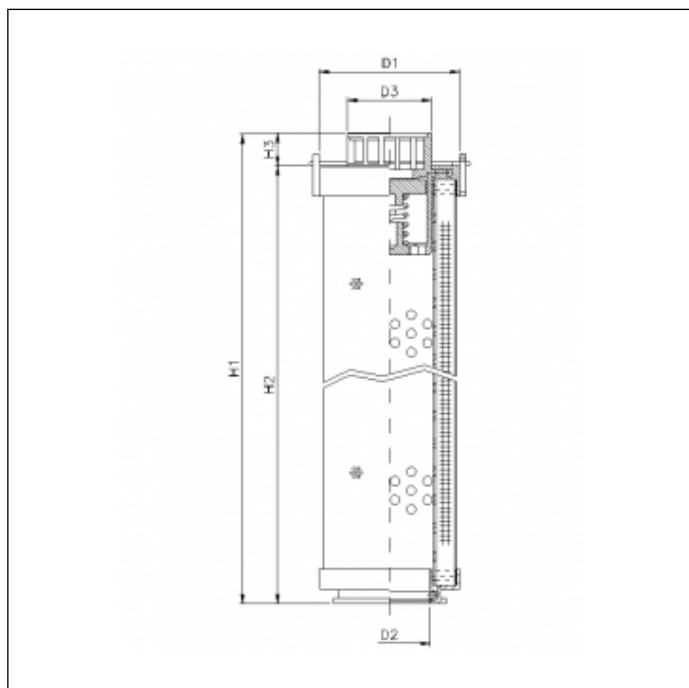

## **OVERALL DIMENSIONS**

D1	60,0 mm
D2	34,0 mm
D3	36,0 mm
H1	295,0 mm
H2	281,0 mm
H3	14,0 mm