


RHR185G10V

printed on: 23-04-2025

TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	10 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	12 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	20 bar
Bypass setting	3.0 bar
Seals	FKM
Temperature range	-25°C +100°C

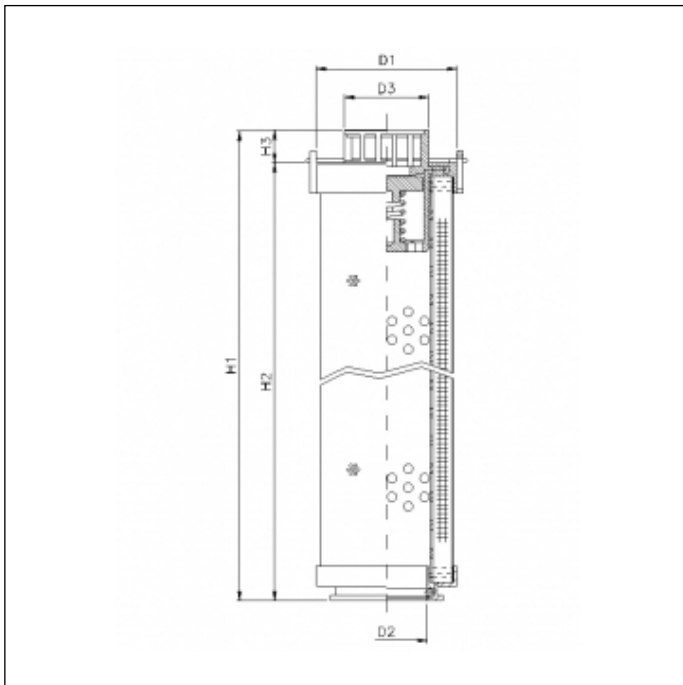

OVERALL DIMENSIONS

D1	60,0 mm
D2	34,0 mm
D3	36,0 mm
H1	295,0 mm
H2	281,0 mm
H3	14,0 mm