


## RHR185G20V/5

printed on: 29-04-2025

### TECHNICAL INFO

|                     |  |
|---------------------|--|
| Media type          | INORGANIC FIBERGLASS                       |
| Efficiency          | 20 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$  |
| Efficiency 1        | 22 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$ |
| Flow direction      | OUT-IN                                     |
| Collapse $\Delta p$ | 20 bar                                     |
| Seals               | FKM  |
| Temperature range   | -25°C +100°C                               |

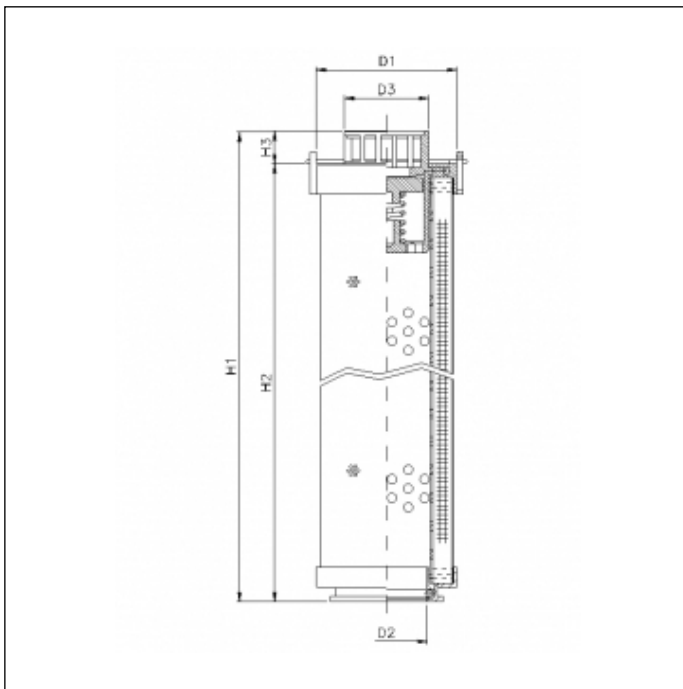

### OVERALL DIMENSIONS

|    |          |
|----|----------|
| D1 | 60,0 mm  |
| D2 | 34,0 mm  |
| D3 | 36,0 mm  |
| H1 | 295,0 mm |
| H2 | 281,0 mm |
| H3 | 14,0 mm  |