


RHR210G03B0/ESD

printed on: 13-04-2026



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	<math> <4 \mu\text{m}_{(c)} \beta_x \geq 200 </math>
Efficiency 1	$5 \mu\text{m}_{(c)} \beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	20 bar
Seals	NBR
Temperature range	-30°C +100°C
Note	ANTI-ESD FILTER ELEMENT

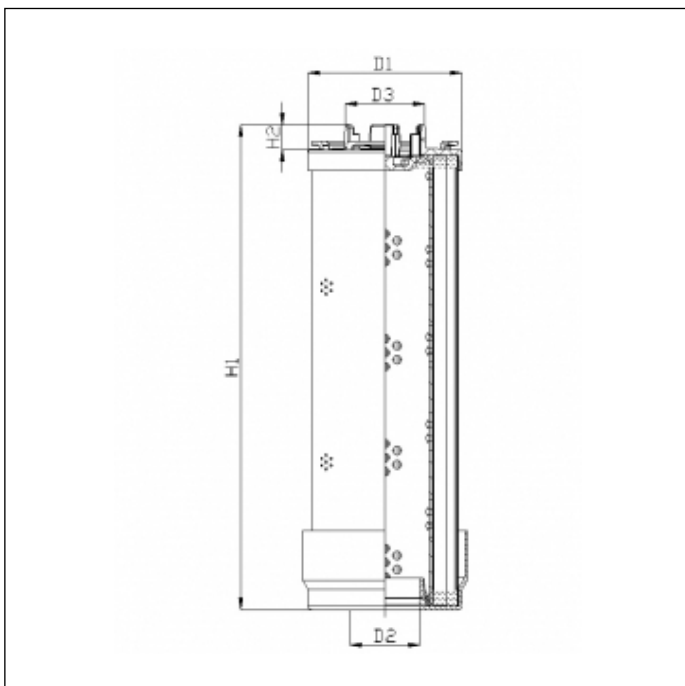

OVERALL DIMENSIONS

D1	88,0 mm
D2	40,1 mm
D3	45,8 mm
H1	277,0 mm
H2	14,0 mm

Technical information may change without notice. Image and drawing are representative only