


## RHR210G03V6/ESD

printed on: 29-04-2025



### TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	<math> <4 \mu\text{m}_{(c)} \beta_x \geq 200 </math>
Efficiency 1	<math> 5 \mu\text{m}_{(c)} \beta_x \geq 1000 </math>
Flow direction	OUT-IN
Collapse $\Delta p$	20 bar
Bypass setting	6.0 bar
Seals	FKM
Temperature range	-25°C +120°C
Note	ANTI-ESD FILTER ELEMENT

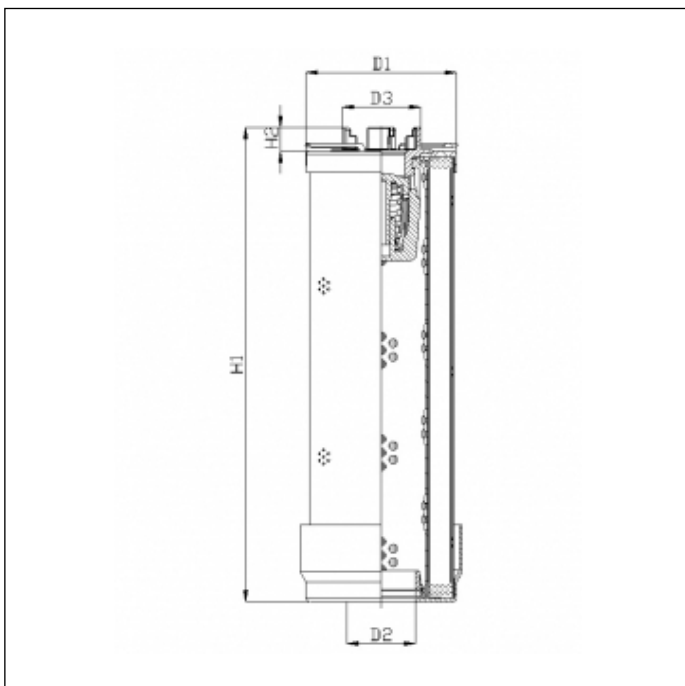

### OVERALL DIMENSIONS

D1	88,0 mm
D2	40,1 mm
D3	45,8 mm
H1	277,0 mm
H2	14,0 mm

Technical information may change without notice. Image and drawing are representative only