


RHR240G03B3/AB1

printed on: 23-04-2025



TECHNICAL INFO

| | |
|---------------------|--|
| Media type | INORGANIC FIBERGLASS |
| Efficiency | <math><4 \mu\text{m}_{(c)} \beta_x \geq 200</math> |
| Efficiency 1 | $5 \mu\text{m}_{(c)} \beta_x \geq 1000$ |
| Flow direction | OUT-IN |
| Collapse Δp | 20 bar |
| Bypass setting | 3.0 bar |
| Seals | NBR |
| Temperature range | -30°C +100°C |

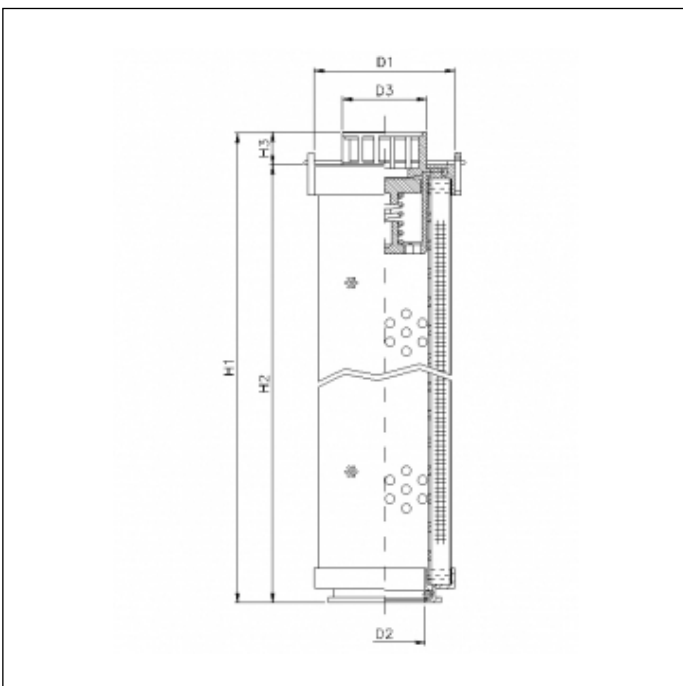

OVERALL DIMENSIONS

| | |
|----|----------|
| D1 | 73,5 mm |
| D2 | 34,5 mm |
| D3 | 36,0 mm |
| H1 | 203,0 mm |
| H2 | 189,0 mm |
| H3 | 14,0 mm |