


## RHR30G01B/3/ESD

printed on: 29-04-2025



### TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	<math> < 4 \mu\text{m}_{(c)} \beta_x \geq 200 </math>
Efficiency 1	<math> 4 \mu\text{m}_{(c)} \beta_x \geq 1000 </math>
Flow direction	OUT-IN
Collapse $\Delta p$	20 bar
Bypass setting	1.0 bar
Seals	NBR
Temperature range	-30°C +100°C
Note	ANTI-ESD FILTER ELEMENT

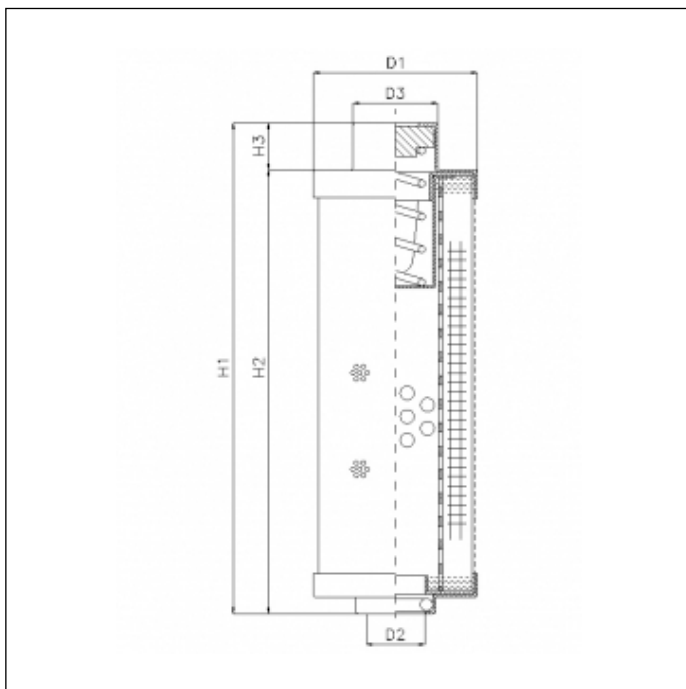

### OVERALL DIMENSIONS

D1	35,0 mm
D2	12,2 mm
D3	17,9 mm
H1	105,0 mm
H2	94,5 mm
H3	10,5 mm

Technical information may change without notice. Image and drawing are representative only