


RHR30N20B

printed on: 29-04-2025



TECHNICAL INFO

Media type	IMPREGNATED PAPER
Efficiency	25 $\mu\text{m}_{(c)}$ $\beta_x \geq 2$
Flow direction	OUT-IN
Collapse Δp	20 bar
Bypass setting	3.0 bar
Seals	NBR
Temperature range	-30°C +100°C

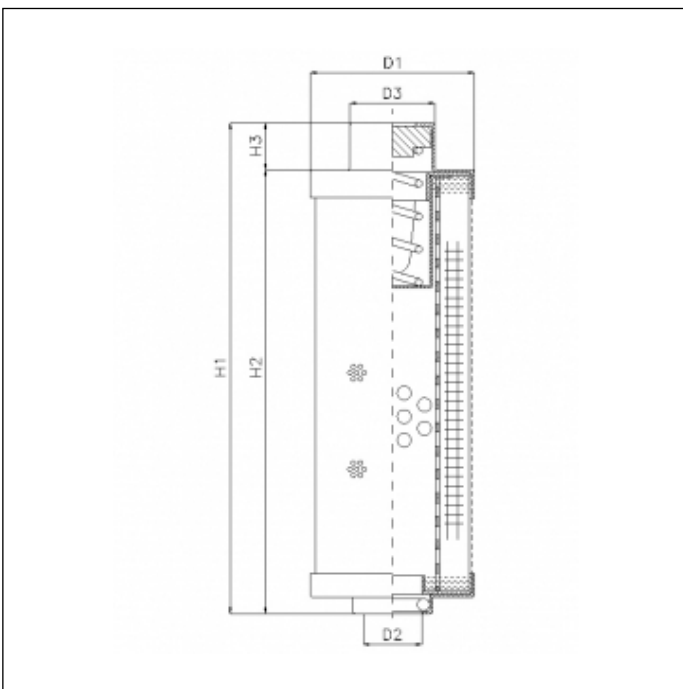

OVERALL DIMENSIONS

D1	35,0 mm
D2	12,2 mm
D3	17,9 mm
H1	105,0 mm
H2	94,5 mm
H3	10,5 mm

Technical information may change without notice. Image and drawing are representative only