


RHR330N10B6/AB1

printed on: 29-04-2025



TECHNICAL INFO

Media type	IMPREGNATED PAPER
Efficiency	10 $\mu\text{m}_{(c)}$ $\beta_x \geq 2$
Flow direction	OUT-IN
Collapse Δp	20 bar
Bypass setting	6.0 bar
Seals	NBR
Temperature range	-30°C +100°C

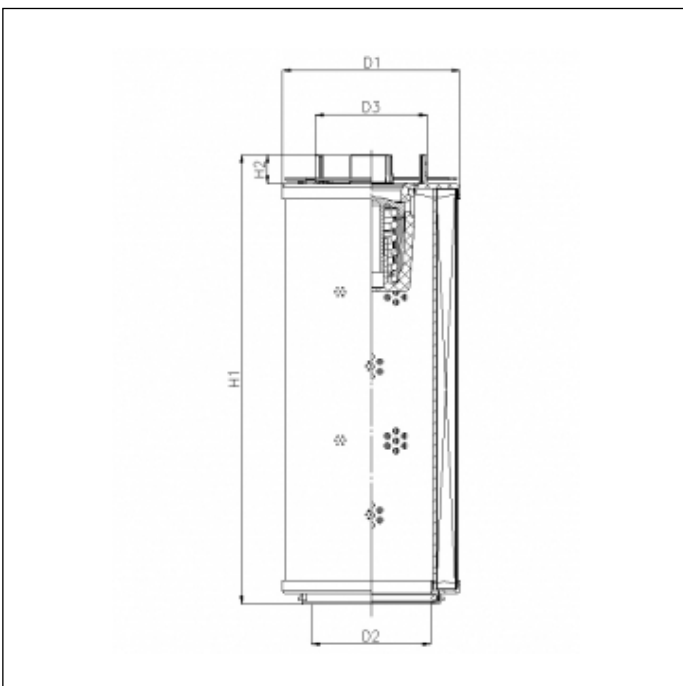

OVERALL DIMENSIONS

D1	94,5 mm
D2	48,2 mm
D3	45,8 mm
H1	194,0 mm
H2	14,0 mm

Technical information may change without notice. Image and drawing are representative only