


RHR500G03B3/AB1

printed on: 24-04-2025



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	<math> < 4 \mu\text{m}_{(c)} \beta_x \geq 200 </math>
Efficiency 1	$5 \mu\text{m}_{(c)} \beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	20 bar
Bypass setting	3.0 bar
Seals	NBR
Temperature range	-30°C +100°C

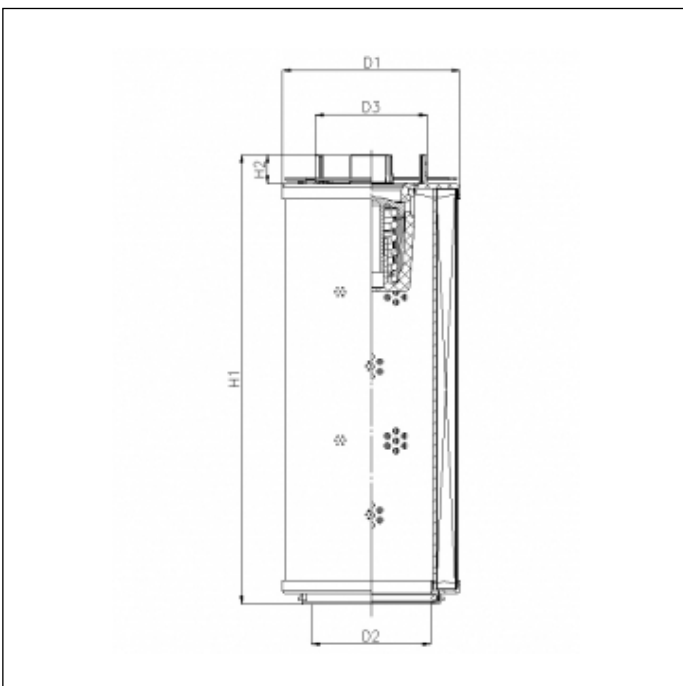

OVERALL DIMENSIONS

D1	94,5 mm
D2	48,2 mm
D3	45,8 mm
H1	275,0 mm
H2	14,0 mm

Technical information may change without notice. Image and drawing are representative only