


## RHR500N20V3/AB1

printed on: 13-04-2026



### TECHNICAL INFO

Media type	IMPREGNATED PAPER
Efficiency	25 $\mu\text{m}_{(c)}$ $\beta_x \geq 2$
Flow direction	OUT-IN
Collapse $\Delta p$	20 bar
Bypass setting	3.0 bar
Seals	FKM
Temperature range	-25°C +100°C

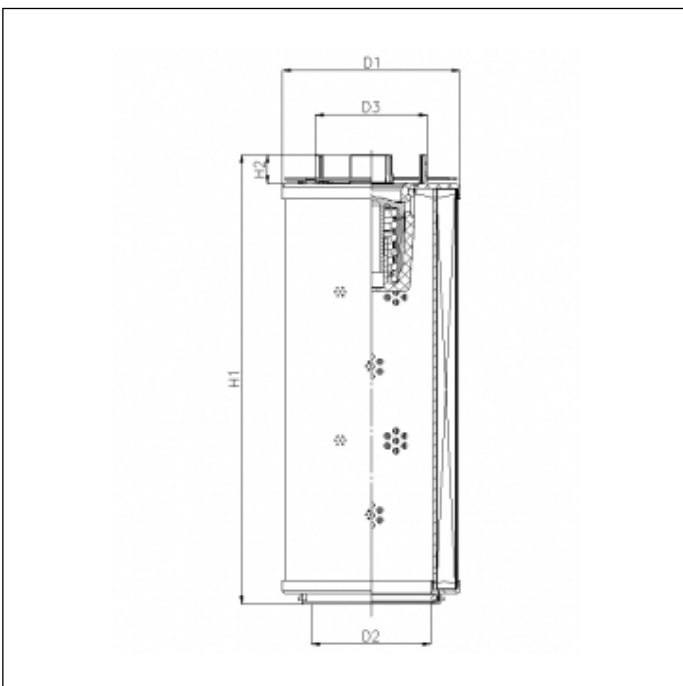

### OVERALL DIMENSIONS

D1	94,5 mm
D2	48,2 mm
D3	45,8 mm
H1	275,0 mm
H2	14,0 mm

Technical information may change without notice. Image and drawing are representative only