


RHR60G01V0/ESD

printed on: 29-04-2025



TECHNICAL INFO

| | |
|---------------------|---|
| Media type | INORGANIC FIBERGLASS |
| Efficiency | <math> < 4 \mu\text{m}_{(c)} \beta_x \geq 200 </math> |
| Efficiency 1 | $4 \mu\text{m}_{(c)} \beta_x \geq 1000$ |
| Flow direction | OUT-IN |
| Collapse Δp | 20 bar |
| Seals | FKM |
| Temperature range | -25°C +120°C |
| Note | ANTI-ESD FILTER ELEMENT |

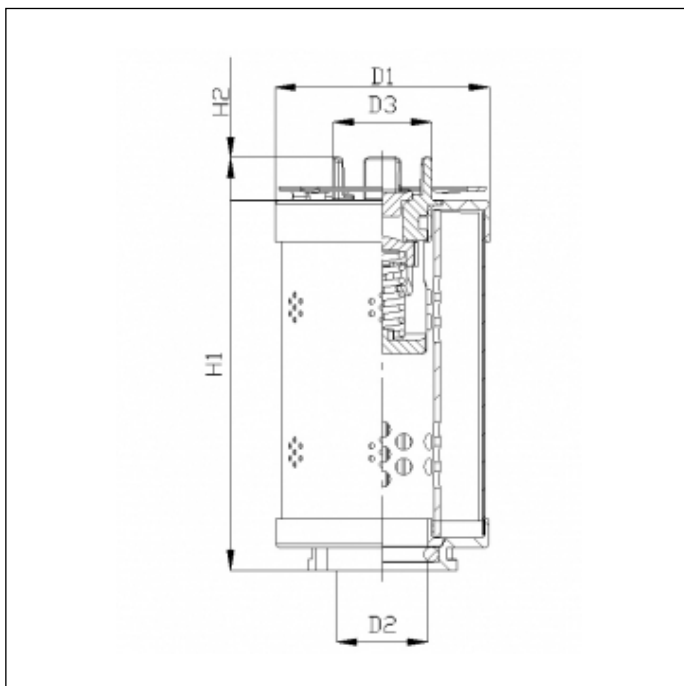

OVERALL DIMENSIONS

| | |
|----|----------|
| D1 | 52,0 mm |
| D2 | 22,2 mm |
| D3 | 24,0 mm |
| H1 | 100,0 mm |
| H2 | 10,3 mm |

Technical information may change without notice. Image and drawing are representative only