


## RHR60G10V3/AB1

printed on: 24-04-2025



### TECHNICAL INFO

|                     |  |
|---------------------|--|
| Media type          | INORGANIC FIBERGLASS                       |
| Efficiency          | 10 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$  |
| Efficiency 1        | 12 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$ |
| Flow direction      | OUT-IN                                     |
| Collapse $\Delta p$ | 20 bar                                     |
| Bypass setting      | 3.0 bar                                    |
| Seals               | FKM  |
| Temperature range   | -25°C +100°C                               |

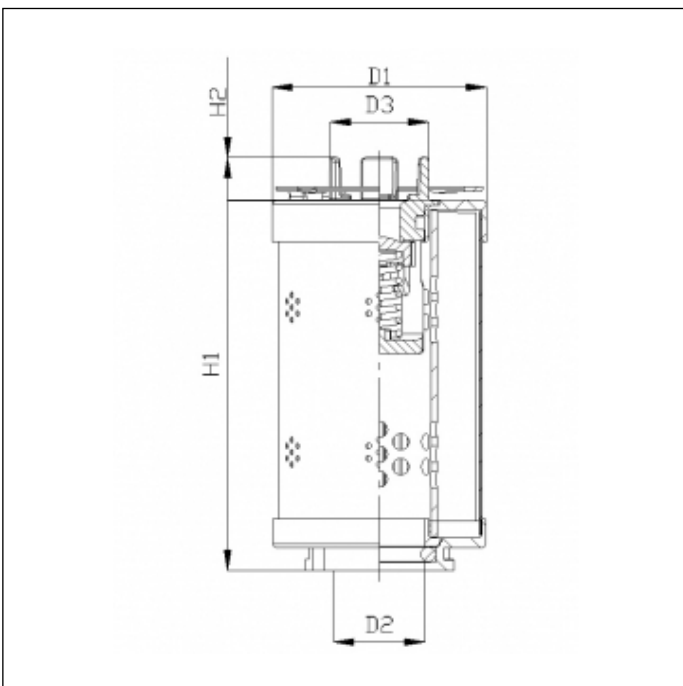

### OVERALL DIMENSIONS

|    |          |
|----|----------|
| D1 | 52,0 mm  |
| D2 | 22,2 mm  |
| D3 | 24,0 mm  |
| H1 | 100,0 mm |
| H2 | 10,3 mm  |

Technical information may change without notice. Image and drawing are representative only