


RHR660A03B

printed on: 20-05-2025

TECHNICAL INFO

Media type	STAINLESS STEEL FIBER
Efficiency	$3 \mu\text{m}_{(c)} \beta_x \geq 200$
Flow direction	OUT-IN
Collapse Δp	20 bar
Bypass setting	3.0 bar
Seals	NBR
Temperature range	-30°C +100°C

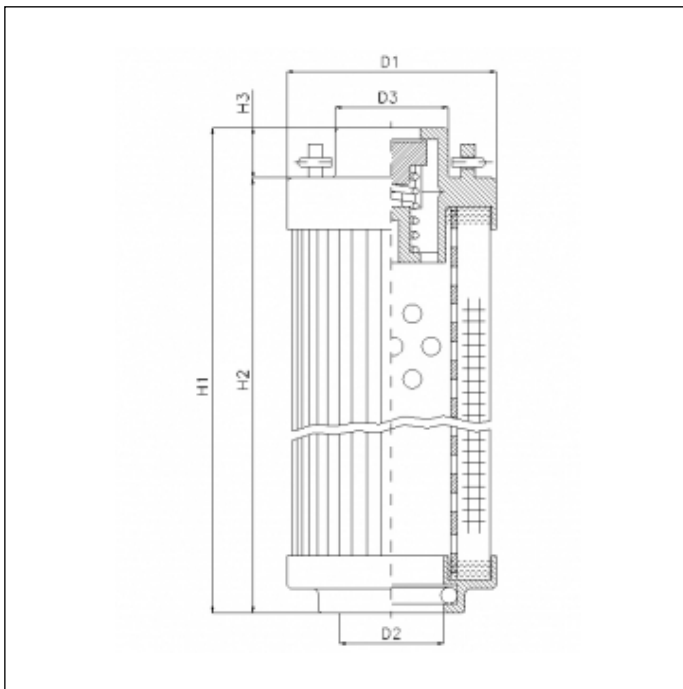

OVERALL DIMENSIONS

D1	95,5 mm
D2	68,5 mm
D3	65,5 mm
H1	333,0 mm
H2	314,5 mm
H3	18,5 mm