


## RHR950A10V

printed on: 29-04-2025



### TECHNICAL INFO

Media type	STAINLESS STEEL FIBER
Efficiency	10 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Flow direction	OUT-IN
Collapse $\Delta p$	20 bar
Bypass setting	3.0 bar
Seals	FKM
Temperature range	-25°C +100°C

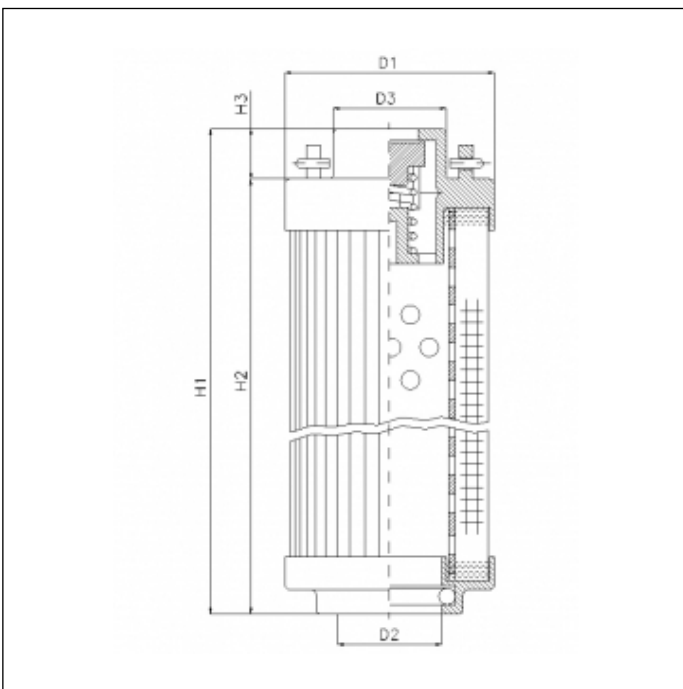

### OVERALL DIMENSIONS

D1	124,5 mm
D2	96,5 mm
D3	95,5 mm
H1	363,0 mm
H2	338,5 mm
H3	24,5 mm

Technical information may change without notice. Image and drawing are representative only