


RVR1225E03B

printed on: 24-04-2025



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	<math><4 \mu\text{m}_{(c)} \beta_x \geq 200</math>
Efficiency 1	$5 \mu\text{m}_{(c)} \beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	30 bar
Temperature range	-25°C +120°C

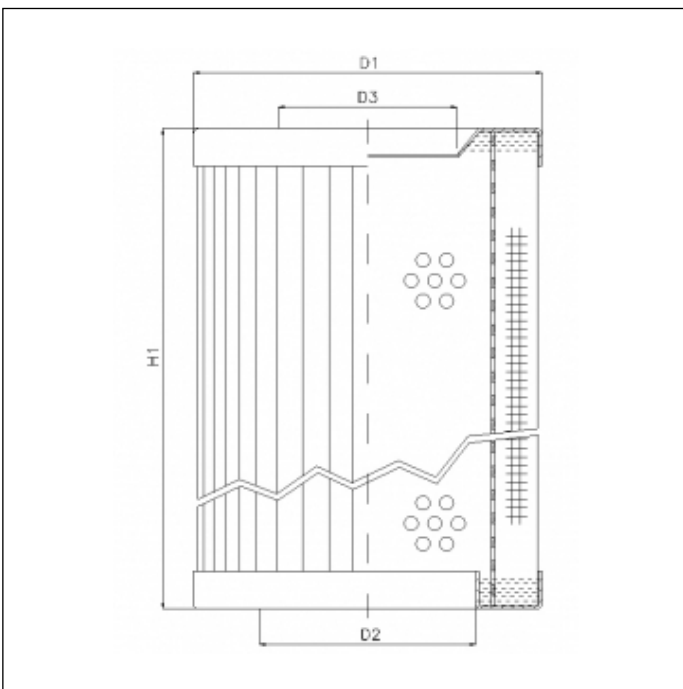

OVERALL DIMENSIONS

D1	74,0 mm
D2	46,0 mm
D3	38,5 mm
H1	222,0 mm

Technical information may change without notice. Image and drawing are representative only