


RVR165E05B

printed on: 29-04-2025



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	5 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	7 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	30 bar
Temperature range	-25°C +120°C

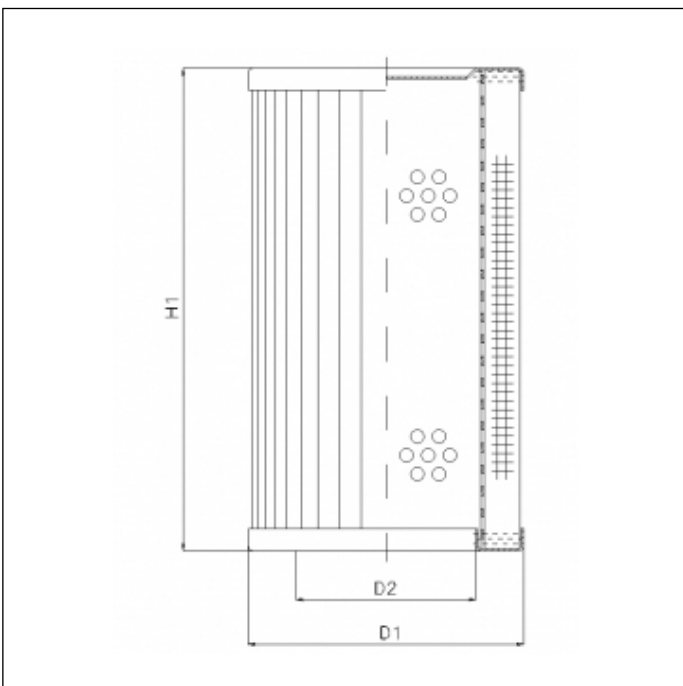

OVERALL DIMENSIONS

D1	102,0 mm
D2	66,5 mm
H1	178,0 mm