


RVR30A05B

printed on: 23-04-2025



TECHNICAL INFO

Media type	STAINLESS STEEL FIBER
Efficiency	5 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Flow direction	OUT-IN
Collapse Δp	30 bar
Bypass setting	2.0 bar
Temperature range	-25°C +120°C

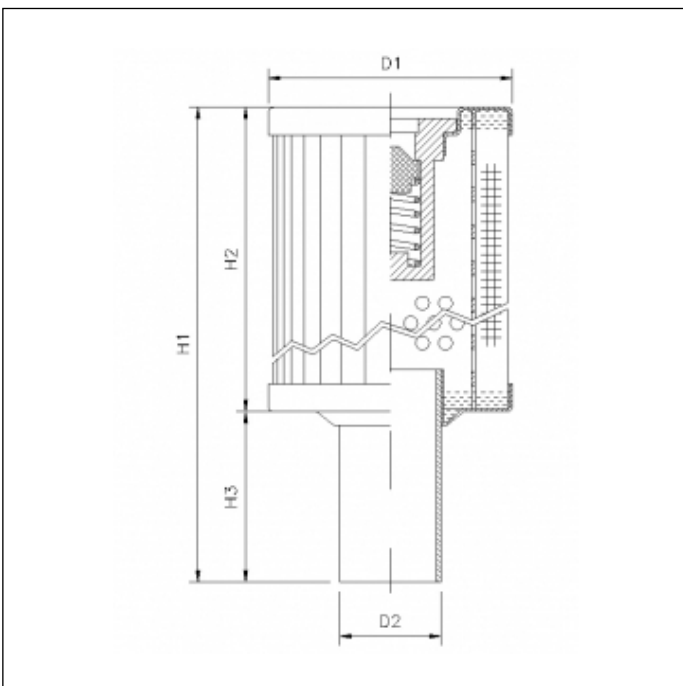

OVERALL DIMENSIONS

D1	53,0 mm
D2	22,0 mm
H1	129,0 mm
H2	92,0 mm
H3	37,0 mm

Technical information may change without notice. Image and drawing are representative only