


RVR30E20B

printed on: 23-04-2025

TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	20 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	22 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	30 bar
Temperature range	-25°C +120°C

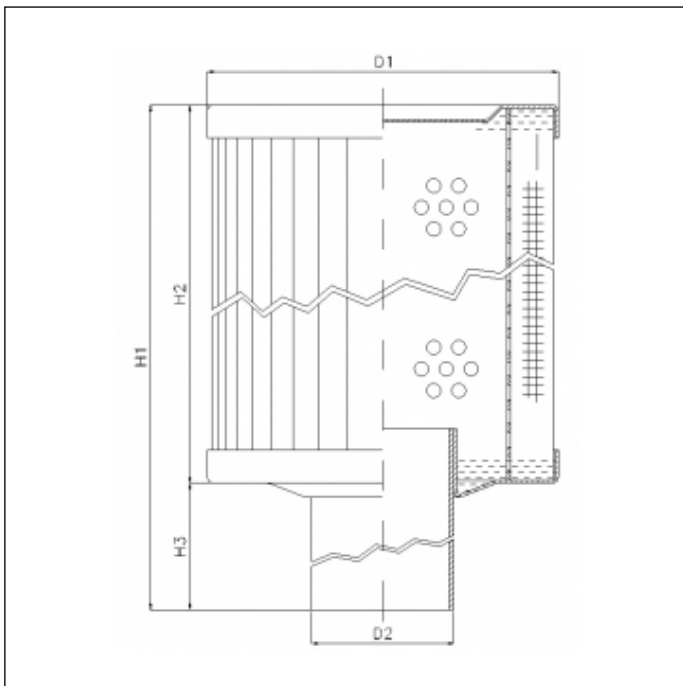

OVERALL DIMENSIONS

D1	53,0 mm
D2	22,0 mm
H1	129,0 mm
H2	92,0 mm
H3	37,0 mm