



## RVR65A05B




printed on: 23-04-2025



## **TECHNICAL INFO**

-	
Media type	STAINLESS STEEL FIBER
Efficiency	$5 \mu m_{(c)} βx ≥ 200$
Flow direction	OUT-IN
Collapse ∆p	30 bar
Bypass setting	2.0 bar
Temperature range	-25°C +120°C

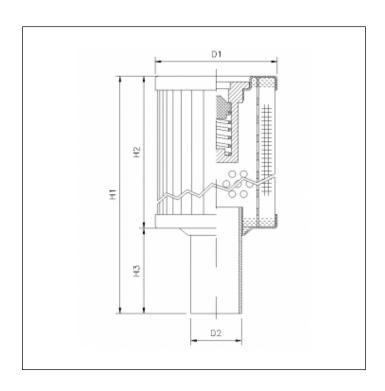

## **OVERALL DIMENSIONS**

D1	53,0 mm
D2	22,0 mm
H1	129,0 mm
H2	92,0 mm
H3	37,0 mm

Technical information may change without notice. Image and drawing are representative only