


WG512

printed on: 23-04-2025

TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	20 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	22 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	IN-OUT
Burst Δp	10 bar
Bypass setting	2.0 bar
Seals	NBR
Temperature range	-30°C +100°C

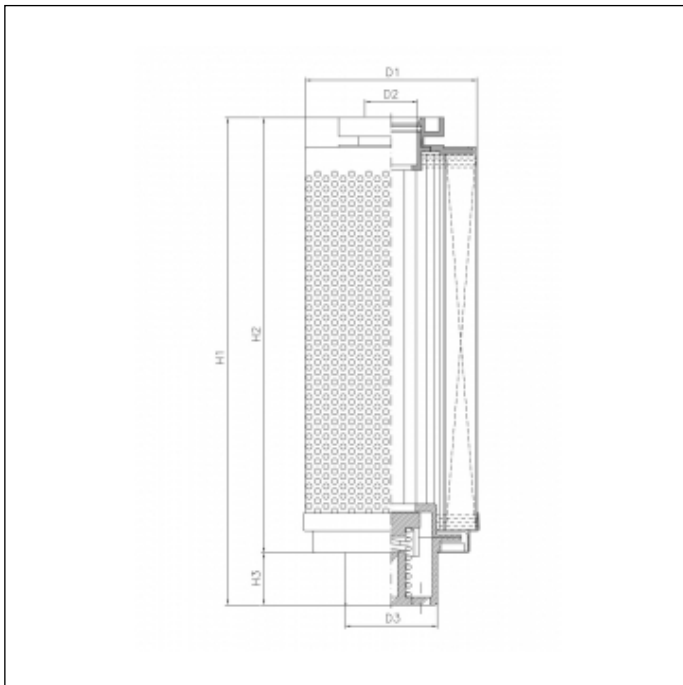

OVERALL DIMENSIONS

D1	85,0 mm
D2	26,5 mm
D3	46,5 mm
H1	244,0 mm
H2	218,0 mm
H3	26,0 mm