


XD040G25B/ESD

printed on: 13-04-2026



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	32 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	35 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	210 bar
Seals	NBR
Temperature range	-30°C +100°C
Note	ANTI-ESD FILTER ELEMENT

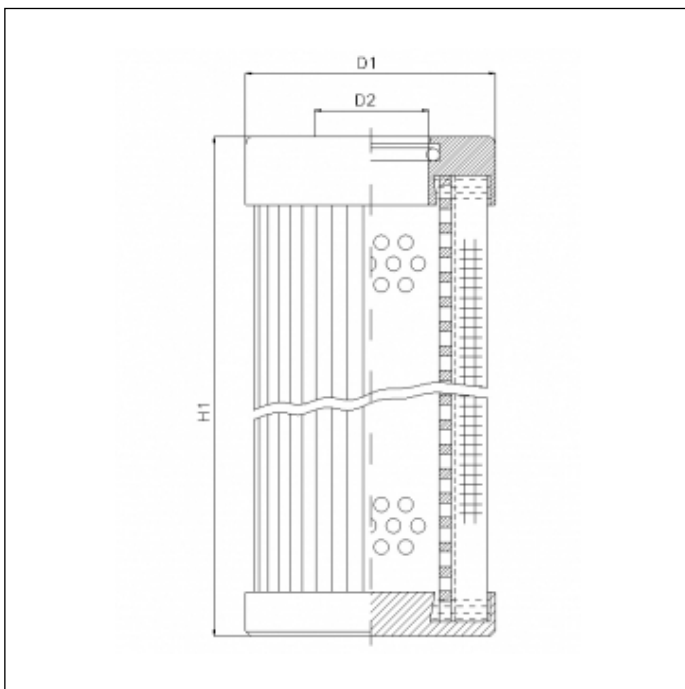

OVERALL DIMENSIONS

D1	44,5 mm
D2	22,1 mm
H1	99,0 mm

Technical information may change without notice. Image and drawing are representative only