


## XD250G03B/ESD

printed on: 05-03-2026



### TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	<math> < 4 \mu\text{m}_{(c)} \beta_x \geq 200 </math>
Efficiency 1	<math> 5 \mu\text{m}_{(c)} \beta_x \geq 1000 </math>
Flow direction	OUT-IN
Collapse $\Delta p$	210 bar
Seals	NBR
Temperature range	-30°C +100°C
Note	ANTI-ESD FILTER ELEMENT

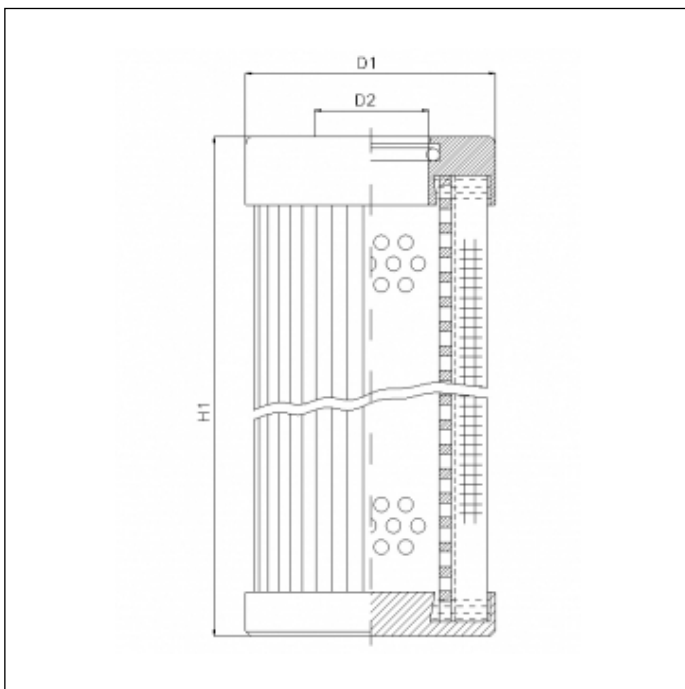

### OVERALL DIMENSIONS

D1	78,0 mm
D2	40,5 mm
H1	248,0 mm

Technical information may change without notice. Image and drawing are representative only