



XR040G10B0/ESD

printed on: 23-04-2025

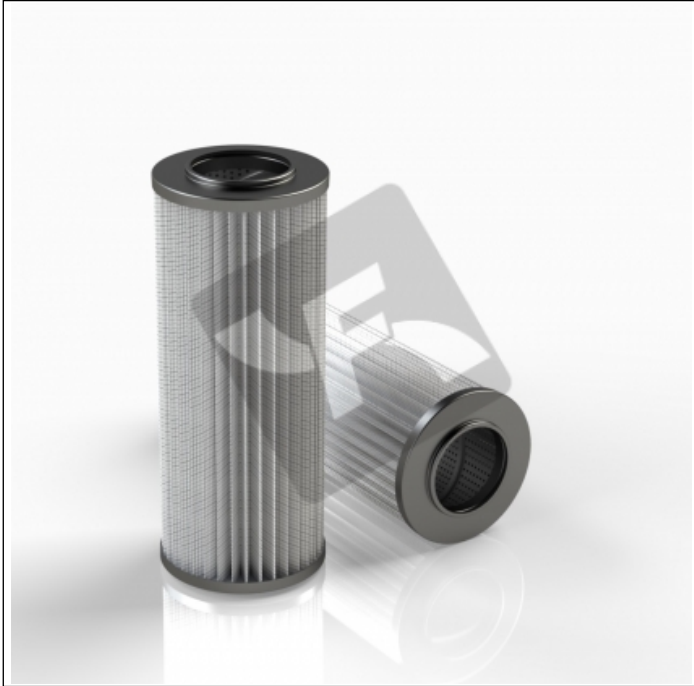

TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	10 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	12 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	10 bar
Seals	NBR
Temperature range	-30°C +100°C
Note	ANTI-ESD FILTER ELEMENT

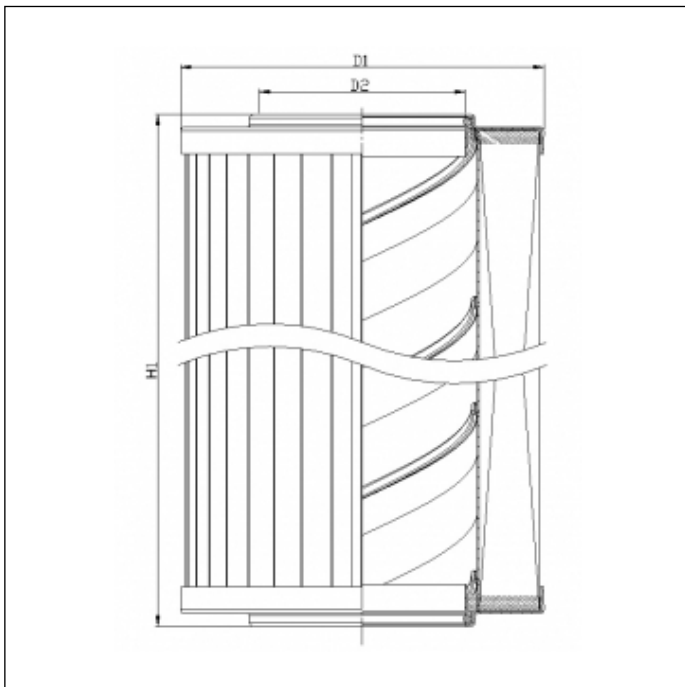

OVERALL DIMENSIONS

D1	59,0 mm
D2	32,5 mm
H1	100,0 mm

Technical information may change without notice. Image and drawing are representative only