


RHR185G20B/2/ESD

printed on: 29-04-2025



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	20 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	22 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	20 bar
Bypass setting	6.0 bar
Seals	NBR
Temperature range	-30°C +100°C
Note	ANTI-ESD FILTER ELEMENT

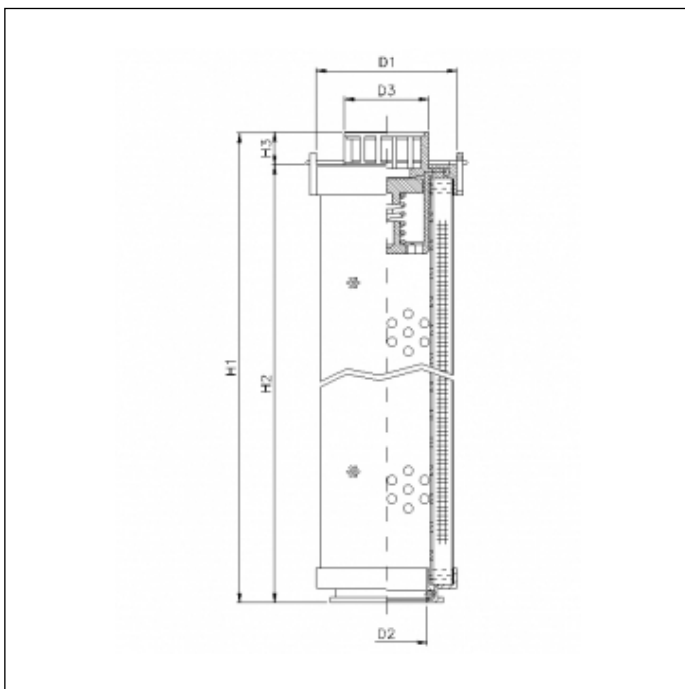

OVERALL DIMENSIONS

D1	60,0 mm
D2	34,0 mm
D3	36,0 mm
H1	295,0 mm
H2	281,0 mm
H3	14,0 mm